

**SAVE UP TO 75%
ENERGY WITH COMPARABLE
LIGHT OUTPUT**

CFL
COMPACT FLUORESCENT



Superior Life® compact fluorescent light bulbs are an efficient way to lamp sockets once traditionally reserved for incandescents, while consuming up to 75% less energy and thereby significantly reducing operating costs. They provide competitive performance, efficiency and up to 12,000 hours of maintenance-free operation. Available in a full selection of sizes, color temperatures and designs that allow a convenient fit for nearly every style of fixture.

FEATURES AND BENEFITS:

- generate less heat, reducing air conditioning load
- light instantly, no flicker
- low-profile size to fit a wide variety of fixtures
- excellent color rendition
- light-weight
- starting temperature is as low as 0° F
- reliable electronic operation

• *Noted Energy Star® items are certified at the time of publication. Please contact PQL directly or visit www.pqlighting.com/energystar for the most recent list of qualified products.*



GLASS PAR REFLECTOR

PART #	DESCRIPTION	WATT	M.O.L.	COLOR	CRI	LUMENS	CASE	BULB	INCANDESCENT EQUIVALENT:
91673	15WPAR30/30K	15	4.87	3000K	80	750	12	c-7	60
91674	15WPAR30/SKY-BRITE®	15	4.87	5000K	85	750	12	c-7	60
91672	15WPAR30/DAY-BRITE™	15	4.87	4100K	>82	750	12	c-7	60
71672	19WPAR30/DAY-BRITE™	19	4.63	4100K	>82	855	12	c-7	75
71674	19WPAR30/SKY-BRITE®	19	4.63	5000K	>82	855	12	c-7	75
71673	19WPAR30/WARM-TONE	19	4.63	2850K	>82	855	12	c-7	75
91675	23WPAR38/WARM-TONE	23	5.00	3000K	85	1280	12	c-8	75
71677	23WPAR38/DAY-BRITE™	23	5.00	4100K	>82	1200	12	c-8	75
91677	23WPAR38/DAY-BRITE™	23	5.00	4100K	80	1200	12	c-8	75
91676	23WPAR38/SKY-BRITE®	23	5.00	5000K	85	1350	12	c-8	75

TCLP
COMPLIANT



This lamp contains mercury. For proper lamp disposal, contact your local municipal solid waste agency directly, call 888-537-4874 or visit lamprecycle.org for state-specific lamp recycling options.

CONTINUED ON BACK...

CFL COLOR REFERENCE GUIDE:

27K WARM TONE	30K WARM WHITE	35K SOFT WHITE	41K DAY- BRITE™	50K FULL SPECTRUM
----------------------------	-----------------------------	-----------------------------	------------------------------	--------------------------------

PLEASE CALL US FOR ADDITIONAL SIZE & COLOR AVAILABILITY




Energy Efficient Products for Every Application

PART #	DESCRIPTION	WATT	COLOR	M.O.L.	LUMENS	CRI	CASE	BULB	INCANDESCENT EQUIVALENT:
81663	11WR20/27K	11	2700K	4.75	320	>82	100	c-35	40
81660	11WR20/35K	11	3500K	4.75	320	>82	100	c-35	40
81692	14WR20/SKY-BRITE®	14	5000K	4.88	460	>82	60	c-35	60
81691	14WR20/27K	14	2700K	4.88	500	>82	60	c-35	60
80331	16WR30/27K <i>energy star</i>	16	2700K	5.50	750	>82	24	c-10	75
81508	15WBR30/30K	15	3000K	5.50	550	>82	20	c-10	60
81515	15WBR30/41K	15	4100K	5.50	550	>82	20	c-10	60
81530	15WBR30/SKY-BRITE®	15	5000K	5.50	550	>82	20	c-10	60
81518	23WBR40/30K	23	3000K	7.05	1050	>82	20	c-11	75
81521	23WBR40/41K	23	4100K	7.05	1050	>82	20	c-11	75
81527	23WBR40/SKY-BRITE®	23	5000K	7.05	1050	>82	20	c-11	75
81665	20WPAR38/35K	20	3500K	5.00	600	>82	20	c-8	75
81677	20WPAR38/SKY-BRITE®	20	5000K	5.00	600	>82	20	c-8	75
81644	5WDECORATIVE/35K	5	3500K	5.00	200	>82	100	c-29	25
81638	7WDECORATIVE/27K/CAND	7	2700K	4.72	280	>82	100	c-29	25
81647	7WDECORATIVE/35K/CAND	7	3500K	4.72	280	>82	100	c-29	25
81645	7WDECORATIVE/35K/MED	7	3500K	4.72	280	>82	100	c-29	25
81654	9WG20/35K- SUPERIOR LIFE®	9	3500K	4.57	350	>82	100	c-30	40
81671	13WMINI-BULLET/35K	13	3500K	4.80	600	>82	40	c-9	40
81686	15WMINI-BULLET/27K	15	2700K	5.70	650	>82	40	c-33	60
81669	15WMINI-BULLET/35K	15	3500K	5.70	650	>82	40	c-33	60
81670	15WMINI-BULLET/SKY-BRITE®	15	5000K	5.70	650	>82	40	c-33	60
91648	14WA19/27K	14	2700K	4.33	800	>80	60	c-12	60
81689	14WA21/SKY-BRITE®	14	5000K	5.65	620	>82	100	c-31	60
71651	20WA21/27K	20	2700K	5.55	1100	>82	24	c-31	75
81484	15WGlobe/27K	15	2700K	5.87	650	>82	40	c-32	60
81687	15WGlobe/SKY-BRITE®	15	5000K	5.87	650	>82	40	c-32	60
70069	3 WAY-13/20/25/SPIRAL/27K	13-20-25	2700K	6.06	1600	>82	60	c-38	75
80319	13W MINI-SPIRAL/BUG LIGHT- SUPERIOR LIFE®	13	YELLOW	4.41	900	N/A	60	c-38	60

Dimmable

71680	14WSPIRAL/WARM TONE/DIMMABLE	14	2700K	4.13	900	>82	72	c-38	60
71686	23WSPIRAL/27K/DIMMABLE	24	2700K	4.75	1500	>82	60	c-38	75
81700	16WR30/27K/DIMMABLE	16	2700K	5.50	750	>82	12	c-10	75

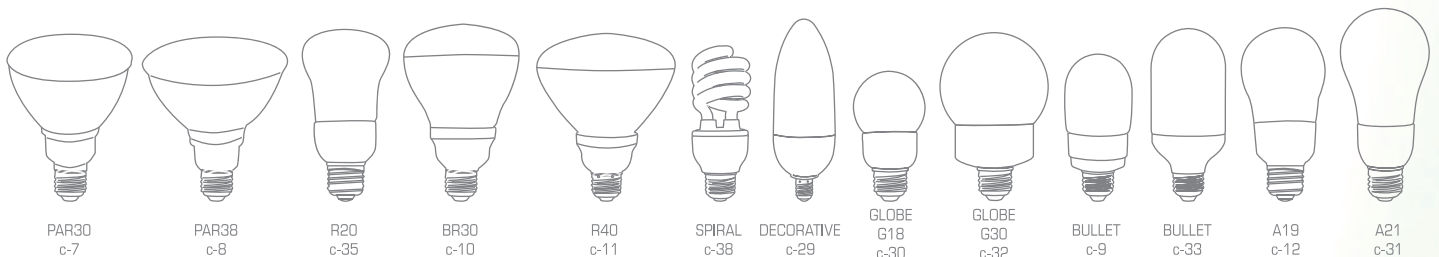

PREMIUM QUALITY LIGHTING
1.800.323.8107 • FAX: 1.877.619.7053
www.pqlighting.com

©2012 PQL, Inc.