




STANDARD FRP FITTING DIMENSIONS

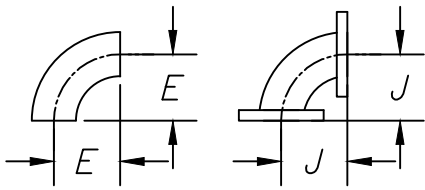


PLAIN FLANGED
90° ELBOW

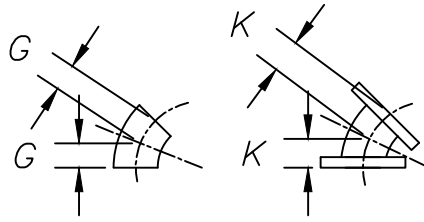


PLAIN FLANGED
45° ELBOW




STUB FLANGE

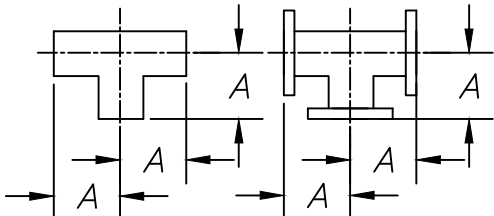

PLAIN FLANGED
TEE

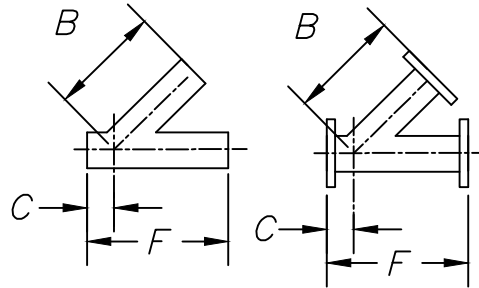


PLAIN FLANGED
45° LATERAL

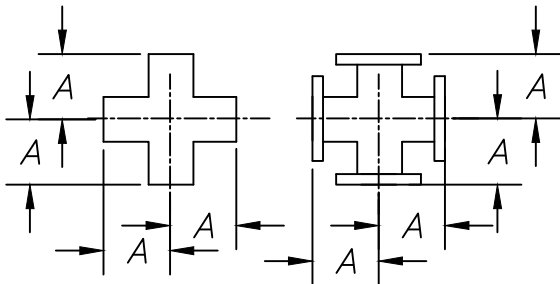


PLAIN FLANGED
CROSS

D	A	B	C	E	F	G	H	J	K
1	6	10	6	1½	16	½	6	6	4
1½	6	10	6	2¼	16	¾	6	6	4
2	6	10	6	3	16	1/8	6	6	4
3	7	12	6	4½	18	1¾	6	6	4
4	8	14	6	6	20	2½	6	6	4
6	10	16	8	9	24	3¾	8	9	3¾
8	12	20	10	12	30	5	8	12	5
10	14	24	10	15	34	6¼	10	15	6¼
12	16	26	12	18	38	7½	10	18	7½
14	18	30	12	21	42	8¾	12	21	8¾
16	20	32	14	24	46	10	12	24	10
18	21	36	14	27	50	11¼	12	27	11¼
20	22	38	16	30	54	12½	12	30	12½
24	24	42	18	36	60	15	12	36	15
30	30	52	20	45	72	18⅝	15	45	18⅝
36	33	62	22	54	84	22½	15	54	22½
42	36	72	24	63	96	26	15	63	26

STUB-INS ARE USED IN PLACE OF REDUCING TEES

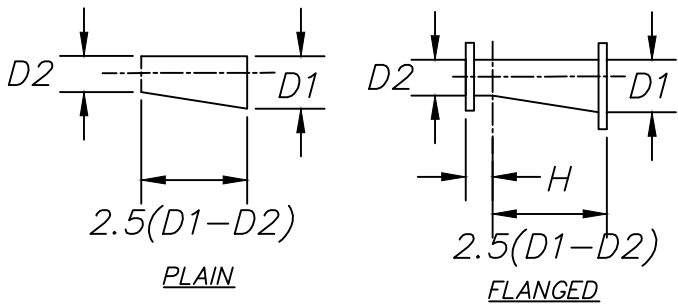

PLAIN FLANGED
ECCENTRIC REDUCER

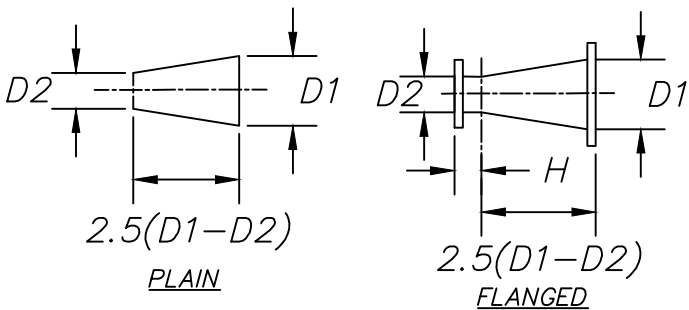

PLAIN FLANGED
CONCENTRIC REDUCER